




Multidoor Access Control - 2 Door

eSSL-Access-8002

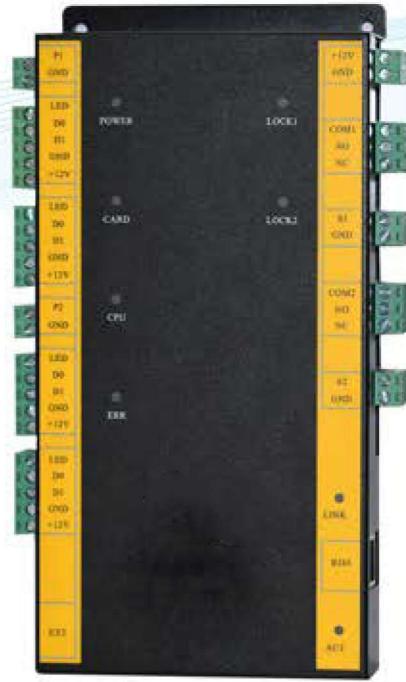

Specification

Card Capacity : 20,000
Event buffer : 1,00,000
Communication : TCP/IP 10M/100M adaptive
Function Description : Control 2 doors, enter via cards swiping and exit via buttons, or both enter & exit via cards swiping
PCB board size : 21.9 * 12.2 * 3.4cm
Controller case size : 273*228*65mm
Power supply : 12V DC 4-7A
Power consumption of circuit board : < 200mA
Reader input format : Wiegand 26/34
Card Reader supported : 4 (2 In & 2 Out)
Door control output : 4
Operation Temperature : -40 °C - 70°C
Operation Humidity : 10-90 % RH, No Condensation

Power interruption protection measure : High Speed Memory, Records never lose
Max Distance between Controllers : TCP/IP communication,
Fire and alarm linkage : Optional

Software and Database Supported :
eSSL Professional Door Control Software
Database Type:- MS Access / MS SQL

Disclaimer: Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development