




Multidoor Access Control - 4 Door

eSSL-Access-8004

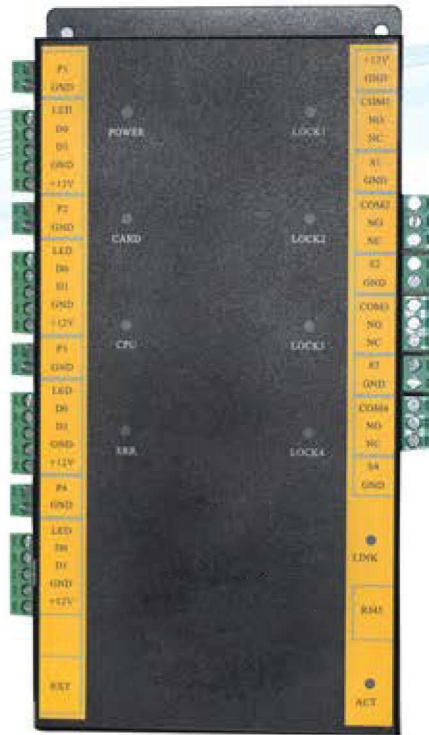

Specification

Card Capacity : 20,000
Event buffer : 1,00,000
Communication : TCP/IP 10M/100M adaptive
Function Description : Control 4 doors, enter via cards swiping and exit via buttons
PCB board size : 21.9 * 12.2 * 3.4cm
Controller case size : 273*228*65mm
Power supply : 12V DC 4-7A
Power consumption of circuit board : < 200mA
Reader input format : Wiegand 26/34
Card Reader supported : 4
Door control output : 4
Delay time for unlocking : 1-600 seconds(adjustable)
Operation Temperature : -40 °C - 70°C
Operation Humidity : 10-90 % RH, No Condensation
256 time Zones, 256 access levels
Anti-passback function
Interlock function
Multi-Card Opening function, Remote door opening
Real-Time monitoring via software

Power interruption protection measure : High Speed Memory, Records never lose
Max Distance between Controllers : TCP/IP communication,
Fire and alarm linkage : Optional

Software and Database Supported :

eSSL Professional Door Control Software
Database Type:- MS Access / MS SQL

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development